

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
21 November 2002 (21.11.2002)

PCT

(10) International Publication Number  
**WO 02/093330 A2**

(51) International Patent Classification<sup>7</sup>: **G06F 1/00**

(21) International Application Number: **PCT/EP02/04963**

(22) International Filing Date: **6 May 2002 (06.05.2002)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
60/291,052 14 May 2001 (14.05.2001) US  
10/123,506 15 April 2002 (15.04.2002) US

(71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET L M ERICSSON (Publ)**  
[SE/SE]; S-126 25 Stockholm (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **STAVENOW, Bengt** [SE/SE]; Kävlingevägen 21, S-222 40 Lund (SE).  
**ANDERSSON, Stefan** [SE/SE]; Koltrastgränd 23, S-230 41 Klågerup (SE).

(74) Agent: **ERICSSON MOBILE PLATFORMS AB**; IPR Department, S-221 83 Lund (SE).

(81) Designated States (*national*): AF, AG, AI., AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GI, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **SYSTEM AND METHOD FOR CONTROLLING ACCESS TO PERSONAL INFORMATION**

(57) Abstract: A mobile communications device includes a fingerprint scanner for generating a scanned fingerprint output data responsive to a scanned fingerprint. The scanned fingerprint output is compared to a reference fingerprint pattern such that a code memo application containing a plurality of data entries each having an associated identifier may be temporarily accessed during a selected period of time if the scanned fingerprint output data matches the reference fingerprint pattern. During the selected period, one of the plurality of data entries may be selected and inserted into a dialog.



**WO 02/093330 A2**



**SYSTEM AND METHOD FOR CONTROLLING  
ACCESS TO PERSONAL INFORMATION**

**RELATED APPLICATION(S)**

- 5        This application claims priority from and incorporates herein by reference the entire disclosure of U.S. Provisional Application Serial No. 60/291,052 filed May 14, 2001.

**TECHNICAL FIELD**

- 10       The present invention relates to the use of personal information such as PIN codes, and more particularly, to a system and method for controlling access to PIN codes using fingerprint scanner technology.

15       **BACKGROUND OF THE INVENTION**

- An increasing problem for users of services provided via the Internet is the large amount of personal information required to access particular websites or information. Personal information such as a user name, addresses or user  
20       IDs are rather long alphanumeric strings that are cumbersome to enter by means of a mobile telephone or other computing device. The increasing number of personal information enabled accesses to data requires a user to remember many PIN numbers, passwords or user names in order to access a  
25       particular website or particular type of information.

      A PIN may be used to open up files within a memory area on a secure token such as a SIM, WIM, or smart card. Additionally, a PIN may provide access to services within a network. In the case of utilizing a PIN to open a file



within a memory area on a secure token, the secure token typically stores a private key to be used in a digital signature operation or with other types of data requiring a high degree of protection. For each type of secure token, an associated security policy states the rules for providing access to individual files within memory on the secure token. The security policy may impose rules requiring entry of a PIN each time the information is accessed. Another rule may require the PIN for the private key used for a digital signature to be different from the PIN used for other operations such as client authorization. Thus, the effect of the security policy may require the end user to remember a set of different PINs required to be entered on a rather frequent basis. With the introduction of WAP, Internet technologies and open execution environments within the MExE framework, there has become an increased demand for user friendly management of numerous PINs within a mobile station or other computing device. A user friendly and secure feature for automatically form filling personal information would assist with entry of this information. There is a need for secure and user friendly manner of managing and making use of a large number of PINS within the mobile station or other computing device .

## SUMMARY OF THE INVENTION

The present invention overcomes the foregoing and other problems with a system for controlling access to personal information. A device includes a fingerprint scanner for scanning the fingerprint of a user and generating scanned fingerprint output data. This scanned fingerprint output data is compared to a reference fingerprint pattern to



determine whether or not they match. If the scanned fingerprint output data and the reference fingerprint pattern match, access is provided for a selected period of time to a listing of data entries each having associated text identifiers. During the selected time period, one of the data entries may be selected. The selected data entry is inserted into a dialog which has been generated in response to a request for the data entry from an application or outside device.

10 The selection may occur by display of the text identifiers on a user interface of the mobile communication device and selection of one of the text identifiers by the user of the mobile communication device. Alternatively, the selection of the data entry may be made by identifying a tag  
15 within the request for the data entry and automatically selecting a data entry associated with that tag. Furthermore, in addition to the text labels, the data entries may have associated therewith specific applications with which the data entry is associated. The application  
20 making a request for a data entry is determined, and the data entry associated with the identified application selected and inserted within the dialog.

#### BRIEF DESCRIPTION OF THE DRAWINGS

25 A more complete understanding of the method and apparatus of the present invention may be obtained by reference to the following Detailed Description when taken in conjunction with the accompanying Drawings wherein:

FIGURE 1 is a block diagram of the system of the  
30 present invention;



FIGURE 2 is an illustration of a memory storing PIN numbers having associated text labels;

FIGURE 3 illustrates a memory with PIN numbers having associated text labels and applications;

5       FIGURE 4 illustrates interaction between a mobile station implementing the system of the present invention and an application located in the mobile station;

FIGURE 5 illustrates a mobile station implementing the system of the present invention interacting with a PC;

10       FIGURE 6 illustrates a request including a tag for accessing a particular PIN number; and

FIGURE 7 is a flow diagram illustrating the operation of a system of the present invention.

## 15   DETAILED DESCRIPTION

Referring now to the drawings, and more particularly to FIGURE 1, there is illustrated a mobile station 10 including a code memo application 15 accessed via a fingerprint scanner 20. While the present discussion describes a system  
20 implemented within a mobile station 10 of a wireless communications network, it should be realized that the system and method of the present invention may be implemented within any computing device requiring the entry of personal information such as PIN codes, user IDs,  
25 passwords or other types of similar information. The code memo application 15 may be implemented within hardware and software of the mobile station 10 and form an integral portion of the mobile station 10 itself. Alternatively, the code memo application 15 may be implemented on a secure  
30 token such as a SIM or WIM on a removable card or a smart card. The term "secure token" is used as a generic term for



any type of security element that is used in relation to the mobile station 10 and where the implementation of the element is based on smart card technology. Examples of such security elements are a SIM, a WIM, or any other type of  
5 chip card.

The code memo application 15 includes a reference fingerprint pattern 25 of a user consisting of data from a fingerprint scan and may comprise a scan of an entire fingerprint, selected reference points from the fingerprint,  
10 etc. The reference fingerprint pattern 25 is used for accessing a PIN code memory 30, or other user related data such as user IDs, passwords, etc. stored the code memo application 15. The PIN code memory 30 which is more fully illustrated in both FIGURES 2 and 3 may be configured in a  
15 number of fashions. In the embodiment illustrated in FIGURE 2, a plurality of PIN numbers 35 associated with a particular user are stored in a first memory location. Associated with each of the PIN 35 in a second memory location are user designated text labels 40. When a user is  
20 selecting a particular PIN number as will be more fully described in a moment, the user designated text labels 40 are displayed to and selected by the user through a user interface 45. Multiple PIN numbers 35 may be stored in either an encoded format or in a protected file on a secure  
25 token. Control/opening of the PIN code memory 30 is accomplished using the fingerprint scanner 20 and control logic 50 within the code memo application 15. Alternatively, as shown in FIGURE 3, the PIN codes 35, in addition to being associated with a particular text label  
30 40, may also have association therewith a particular application 55 or a specific PIN input dialog within the



application. In this case, access of the code memo application 15 by a particular application triggers automatic provision of a PIN number 35 associated with the application after accessing of the PIN code memory 30 by  
5 verification of a scanned fingerprint input. Thus, the user does not have to scroll through and select a particular PIN.

The control logic 50 controls the procedure by which access is provided to information stored within the PIN code memory 30. The control logic 50 consists of a verification  
10 function 60, display function 65, insertion function 70 and management function 75. These functions are implemented in hardware, software, or firmware or a combination thereof. The verification function 60 controls comparison of the reference fingerprint pattern 25 to a scanned fingerprint  
15 output received from the fingerprint scanner 20. If the scanned fingerprint output data, which may comprise an entire fingerprint scan, selected reference points or any other technique known for representing scanned fingerprint data, received from the fingerprint scanner 20 matches the  
20 reference fingerprint pattern 25, the PIN code memory 30 is accessible for a selected period of time, and the display function 65 utilizes the user interface 45 to display a list of text labels that are associated with PIN numbers of a user. A user, utilizing the user interface 45, selects a  
25 particular text label 40 associated with one of the PIN numbers 35. The display function 65 and verification function 60 only keeps the PIN codes open to be accessed by the user for a selected period of time. If a user does not select a particular text label 40 within the selected period  
30 of time, access to the PIN code memory 30 is ended and the user must reaccess the PIN codes by again having their



fingers scanned by the fingerprint scanner 20. The insertion function 70 inserts the selected PIN number 35 within the PIN dialog associated with information a user is attempting to access.

5       The management function 75 enables the user to alter information stored within the PIN code memory 30 and the reference fingerprint pattern 25. The management 75 function which is also accessible using the fingerprint scanner 20 enables PIN numbers 35 in the PIN code memory 30  
10 to be specified, deleted or changed. Additionally, text labels 40 may be added or changed, and a length of a time before which access to the PIN memory code 30 is discontinued after a successful opening may also be controlled. The reference fingerprint pattern also may be  
15 changed to accommodate different users.

One time password generator 80 may be related to a particular PIN name 35/text label 40. When a text label 40 is selected, a one time password is automatically generated and inserted into the PIN dialog by the insertion logic 70.  
20 The one time password generator 80 is useful if the PIN code/password should be sent to a server/receiver other than the mobile station 10. The one time password generator 80 implies an encryption of the password over the communication channel may not be required. The password generator  
25 provides additional security for transmitted passwords by using a password only a single time.

Referring now to FIGURES 4 and 5, there are illustrated manners in which the control logic 50 would be initiated to display the text labels 40 for various PIN numbers 35 to a  
30 user via a user interface 45. In a first embodiment, an application 85 requests at 90 a PIN number from the mobile



station 10. The application 85 resides internally of the mobile station 10. In response to the request, a dialog screen requests input of certain user information, and the user provides a fingerprint scan of their fingerprint to the fingerprint scanner 20 in an attempt to access the PIN memory code 30 to provide this information. If successful PIN code memory access is achieved, a response 35 including the required PIN code information is transmitted back to the application 85.

10 In another embodiment of the invention, the PIN dialog provided to the user may be invoked not by an application 85 associated with the mobile station but by a signal received externally from another device as an AT command received through a Bluetooth interface 115 or serial interface 120  
15 (FIGURE 1). An example of one configuration is illustrated in FIGURE 5 wherein a PC 100 may be running, for example, an E-commerce application. When an application on the PC 100 requests a PIN code via a dialog, the PC application transmits an AT command 105 to the mobile station 10 over a  
20 Bluetooth or serial connection. The PIN input dialog appears on the mobile station user interface 45, and a response 110 including a PIN 35 is transmitted over an external interface as an AT command back to the PC 100 after a text label is selected by a user. Since the PIN is  
25 transmitted over an external interface, the PIN is preferably related to a one time password generated by the password generator 80.

In a further embodiment of the invention, the PIN information requested by an application may be related to a  
30 specific tag included in an application protocol. As illustrated in FIGURE 6, the request transmitted for



information in a PIN dialog would include the request 130 and the associated tag 135. The tag 135 is generic such that the code memo application 15 may relate the specific tag to information saved within the PIN code memory 30 and  
5 enable it to be generated automatically. An example of such technology is the IETF (Internet Engineering Task Force) standard referred to as ECML (E-commerce Markup Language). The ECML standard specified main fields for markup language, such as WML (Wireless Markup Language) and XHTML (Extended  
10 Hypertext Markup Language), such that markup language forms could be automatically filled in.

Referring now to FIGURE 7, there is illustrated a flow diagram describing the operation of the system illustrated in FIGURE 1 and discussed above. An application requiring a  
15 particular PIN number for a PIN dialog requests at step 140 a PIN input. In response to the PIN request, a further input must be received at step 145 from a user consisting of a fingerprint scan from the fingerprint scanner 20. This is accomplished by a user placing the appropriate finger over  
20 the fingerprint scanner 20 associated with the mobile station 10 and having a scan made of the fingerprint. Inquiry step 150 determines if the proper fingerprint scan has been received by comparing it with the reference fingerprint pattern 25. If the incorrect fingerprint scan  
25 is received, the procedure ends at step 160. Otherwise, the PIN code memory 30 is open to access at step 165 for a selected period of time. After the PIN code memory 30 is opened, inquiry step 170 determines if a text label associated with a particular PIN number has been input. If  
30 not, inquiry step 175 determines if the time period for maintaining open access to the PIN code memory 30 has



expired. If not, control passes back to step 170 to continue monitoring for input of a selected text label. Upon expiration of the timer, inquiry step 125 closes the PIN code memory 30 at step 155 and ends the process at step 5 160. If a selected text label is received at step 170, the PIN number associated with the selected text label is inserted into the appropriate PIN dialog at step 180.

While the foregoing discussion has specifically been described with respect to a system requiring a PIN input to 10 a PIN dialog, it should be realized that the system is equally applicable to any system requiring the input of particular user information such as name, user ID, password, address, etc. that the user may wish to protect but may be periodically required to be entered by the user in response 15 to a particular dialog input request from various applications.

The previous description is of a preferred embodiment for implementing the invention, and the scope of the invention should not necessarily be limited by this 20 description. The scope of the present invention is instead defined by the following claims.



**WHAT IS CLAIMED IS:**

1. A computing device (10), characterized by:  
a fingerprint scanner (20) for generating a  
scanned fingerprint output data responsive to a scanned  
5 fingerprint;  
a reference fingerprint pattern (25); and  
a code memo application (15) containing at least  
one piece of data (35) having an identifier (40) associated  
therewith, wherein said code memo application (15) is  
10 accessible for only a selected period of time if the scanned  
fingerprint output data matches the reference fingerprint  
pattern (25).
2. The computing device (10) of Claim 1, wherein the  
code memo application (15) inserts a selected piece of data  
15 into a dialog.
3. The computing device (10) of Claim 1, wherein the  
code memo application (15) selects and inserts at least one  
piece of data (35) into a dialog responsive to a tag (135)  
within a received request (130).
- 20 4. The computing device (10) of Claim 1, wherein the  
code memo application (15) selects and inserts the at least  
one piece of data (135) into a dialog responsive to  
determination of an application providing a request (130).
5. The computing device (10) of Claim 1, wherein the  
25 computing device comprises a mobile communication device.



6. The computing device (10) of Claim 1, wherein the code memo application (15) further displays the identifier (40) associated with the at least one piece of data (35) for selection by a user during the selected period of time.

5        7. The computing device (10) of Claim 1, wherein the code memo application further comprises:

         a memory (30) for storing the at least one piece of data (35) and the associated identifier (40), said memory (30) accessible only during the selected period of time.

10       8. The computing device (10) of Claim 7, wherein the memory (30) further stores an application (55) associated with the at least one piece of data.

         9. The computing device (10) of Claim 1, wherein the at least one piece of data comprises at least one PIN number  
15 (35).

         10. The computing device (10) of Claim 1, further including a password generator (80) for generating a password for combination with the at least one piece of data (135).



11. A method for controlling access to user data (35), comprising the steps of:

receiving (145) a scanned fingerprint output from  
5 a fingerprint scanner (20);

comparing (150) the scanned fingerprint output to a reference fingerprint pattern (25);

providing (165) access to a plurality of data entries (35) having associated identifiers (40) for a  
10 selected period of time if the scanned fingerprint output matches the reference fingerprint pattern (25);

selecting (170) one of the plurality of data entries (35) during the selected period of time; and

inserting (180) a selected data entry (35) into a  
15 dialog.

12. The method of Claim 11, wherein the step of selecting further comprises the steps of:

displaying the associated identifiers (40) for each of the plurality of data entries (35) during the  
20 selected time period; and

receiving a selection input of one of the associated identifiers (40) corresponding to the selected data entry (35).



13. The method of Claim 11, wherein the step of selecting further comprises the steps of:

identifying a tag (135) associated with a request (130) for one of the plurality of data entries (35);

5 determining a data entry (35) of the plurality of data entries (35) associated with the tag (135); and

selecting the data entry (35) associated with the tag (135) as the selected data entry (35).

14. The method of Claim 11, wherein the step of selecting further comprises the steps of:

determining an application (55) making a request for one of the plurality of data entries (35);

accessing the plurality of data entries (35) having associated identifiers (40), each of the plurality of data entries (35) further having an application indicator (30) associated therewith to determine a data entry (35) associated with the application (55); and

selecting the data entry (35) associated with the identified application (55).

20



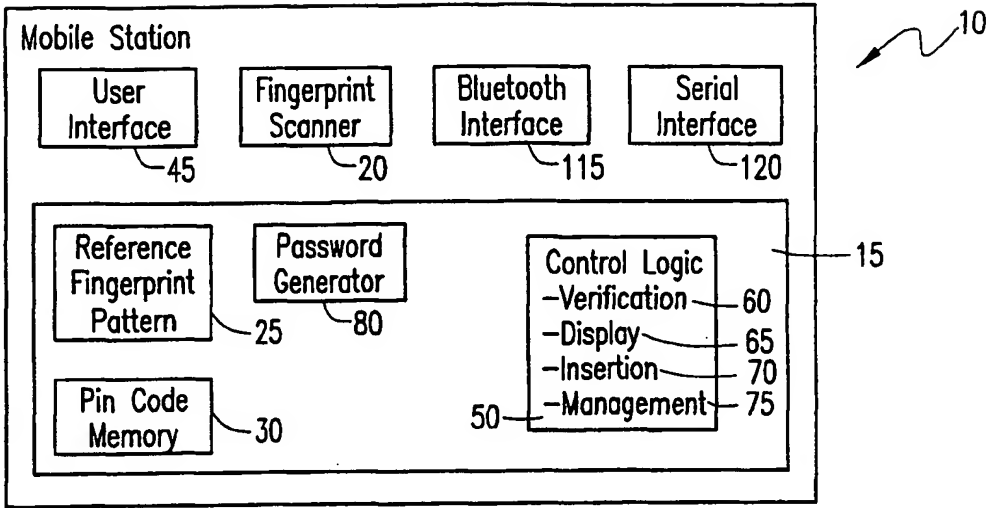


FIG. 1

40 Text Labels	35 PIN Numbers
Work	XXXXXX
Bank	XXXXXX
Stock	XXXXXX
Books	XXXXXX

FIG. 2

40 Text Labels	35 PIN Numbers	55 Application
Work	XXXXXX	
Bank	XXXXXX	
Stock	XXXXXX	
Books	XXXXXX	

FIG. 3

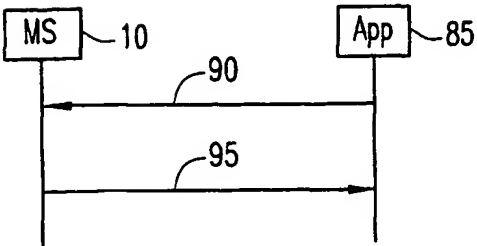


FIG. 4



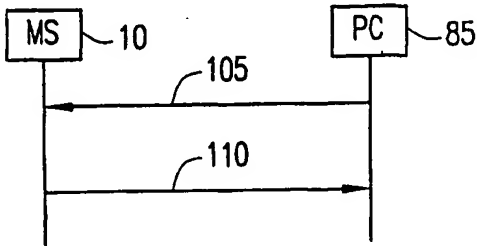


FIG. 5



**FIG. 6****FIG. 7**

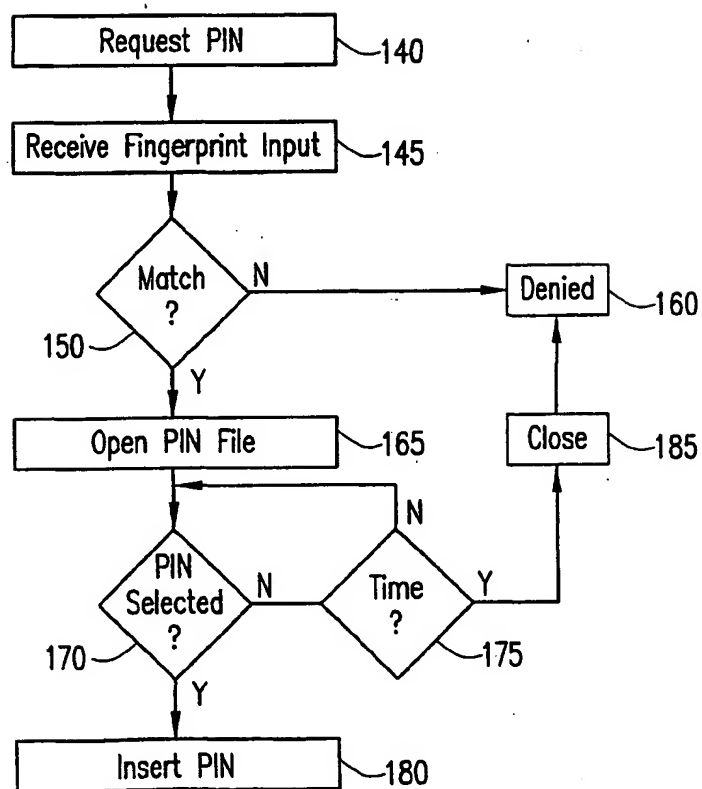

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
21 November 2002 (21.11.2002)

PCT

(10) International Publication Number  
**WO 2002/093330 A3**

(51) International Patent Classification<sup>7</sup>: G06F 1/00, 21/00

(21) International Application Number:  
PCT/EP2002/004963

(22) International Filing Date: 6 May 2002 (06.05.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/291,052 14 May 2001 (14.05.2001) US  
10/123,506 15 April 2002 (15.04.2002) US

(71) Applicant (for all designated States except US): TELEFONAKTIEBOLAGET L. M. ERICSSON (Publ) [SE/SE]; S-126 25 Stockholm (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): STAVENOW, Bengt [SE/SE]; Kävlingevägen 21, S-222 40 Lund (SE). ANDERSSON, Stefan [SE/SE]; Koltrastgränd 23, S-230 41 Klågerup (SE).

(74) Agent: ERICSSON MOBILE PLATFORMS AB; IPR Department, S-221 83 Lund (SE).

(81) Designated States (*national*): AE, AG, AI., AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GI, GM, IIR, IU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:  
— with international search report

(88) Date of publication of the international search report:  
11 March 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SYSTEM AND METHOD FOR CONTROLLING ACCESS TO PERSONAL INFORMATION

(57) Abstract: A mobile communications device includes a fingerprint scanner for generating a scanned fingerprint output data responsive to a scanned fingerprint. The scanned fingerprint output is compared to a reference fingerprint pattern such that a code memo application containing a plurality of data entries each having an associated identifier may be temporarily accessed during a selected period of time if the scanned fingerprint output data matches the reference fingerprint pattern. During the selected period, one of the plurality of data entries may be selected and inserted into a dialog.

WO 2002/093330 A3



## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/EP 02/04963

A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 7 G06F1/00 G06F21/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
 IPC 7 G06F H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 00 42491 A (RAINBOW TECHNOLOGIES INC) 20 July 2000 (2000-07-20) page 13, line 1 - page 14, line 21 page 6, line 1 - line 15 page 3, line 22 - page 4, line 13 page 24, line 3 - page 25, line 21 ---	1-14
Y	EP 0 593 386 A (IBM) 20 April 1994 (1994-04-20) column 1, line 39 - column 2, line 33 column 5, line 42 - line 47 claims 1-3 --- -/--	1-14

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

3 November 2003

Date of mailing of the international search report

11/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Veillas, E .



## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/EP 02/04963

## C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 99 10793 A (LINKOLA JANNE ; SONERA OY (FI); HOKKANEN TUOMO (FI)) 4 March 1999 (1999-03-04) page 2, line 36 - page 4, line 19 page 5, line 6 - line 11 page 7, line 4 - page 8, line 25 -----	2-9, 11-14
A	US 5 812 764 A (HEINZ SR MICHAEL WILLIAM) 22 September 1998 (1998-09-22) see whole document -----	10



## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 02/04963

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0042491	A	20-07-2000	AU 2608200 A EP 1141806 A1 JP 2002535746 T WO 0042491 A1 US 2003028797 A1 US 2001043702 A1 US 2002046342 A1	01-08-2000 10-10-2001 22-10-2002 20-07-2000 06-02-2003 22-11-2001 18-04-2002
EP 0593386	A	20-04-1994	EP 0593386 A2 JP 7234837 A US 5420936 A	20-04-1994 05-09-1995 30-05-1995
WO 9910793	A	04-03-1999	FI 973528 A AU 743967 B2 AU 8865798 A CA 2301938 A1 CN 1269027 T EP 1008023 A1 WO 9910793 A1 JP 2001514409 T	28-02-1999 14-02-2002 16-03-1999 04-03-1999 04-10-2000 14-06-2000 04-03-1999 11-09-2001
US 5812764	A	22-09-1998	NONE	